



## PIXIE SMART DIMMER SDD350BT G2


350 watt blue-tooth technology push button dimmer - generation 2

### Application

Smart digital lighting control with blue-tooth connectivity for residential and commercial spaces

### Design Specifications

- When used as a digital device, Push on/off , Hold to dim up or down, Memory function, Selectable minimum dim level,
- When used with the SAL PIXIE app, set a scene, group devices, set a schedule, dim, switch, set a timer.
- Fully compatible with PIXIE PLUS, so with the inclusion of the SAL Gateway and the internet, you can control your PIXIE devices from anywhere in the world.
- Overheating, overload and full short circuit protection, maximum load 350 watt, minimum load 2 watt
- SMART LED indicator, Trailing edge phase cutting dimming, Fit most branded switch plates. 1, 2 or 3 gang,
- Complies to AS/NZS 60669.2.1, typical wireless range 15 metres

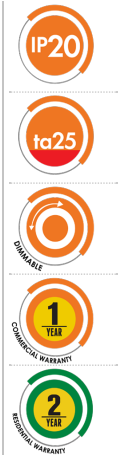

### Performance

Dimmable - **YES**

Dimmer Type - **Trailing edge**

### Technical Specification


Model No.	Description	Input Voltage (V/AC)	Power (W)	Dim (mm)
<b>SDD350BT G2</b>	BLUETOOTH SMART DIMMER 350W	240	350	40(L) x 24(W) x 38(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

### Dimensions

# Wiring Diagram

## SDD350BT G2 - Standard wiring diagram

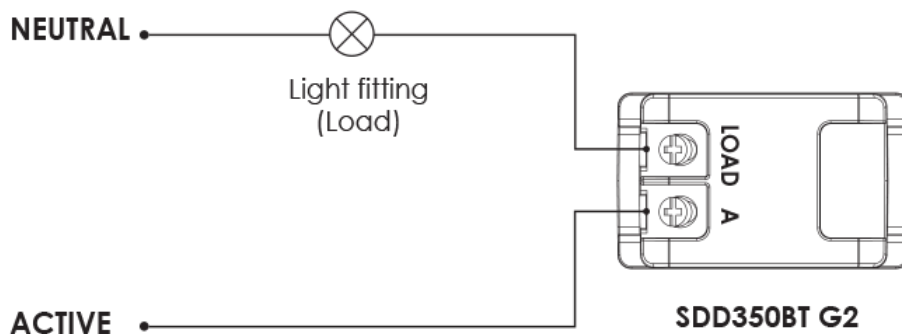

## SDD350BT G2 - Optional wiring diagram

