

DOWNLIGHTS

TAYLOR LED CCT3 SELECTABLE



TAYLOR

7W, 9W and 10W LED CCT selectable LED

Dimmable DownlightThe TAYLOR LED Downlight from ROBUS is the natural evolution of the IMPACT range allowing the installer to choose the Correlated Colour Temperature (CCT) depending on the installation requirements.


This high quality downlight is available with the option to choose warm or cool or daylight white and provides uniform and shadow free light output. Comes with an integral driver and is pre-wired with flex and plug top for fast and simple installation.

The aesthetic is neat, unobtrusive and ideal to retro-fit into existing apertures. This downlight achieves a rating of IC-4 and IC-F as specified in Appendix ZZ of ASNZS 605-98-2-2:2016 for installation in voids and insulation coverage.

TAYLOR is ideal for installation in entertainment venues, domestic, commercial or retail applications as task, complementary or the main light source and exceeds the performance of traditional halogen by some margin with exceptional light output combined with long life.

TAYLOR LED CCT3 selectable



- Suitable for use in residential, offices, retail shops, reception areas, hotels, restaurants, bars & clubs, showrooms
- Aluminum housing encased in thermally conductive plastic with opal diffuser
- Integrated driver pre-wired with choice of loop in loop out terminal or 0.6m of flex and plug with 9W fittings
- Switch on the back of fitting allows selection of CCT between 3000K, 4000K and 6500K – an adaptable solution for every install
- Dimmer compatibility list available on website
- Complete with White and Silver trims

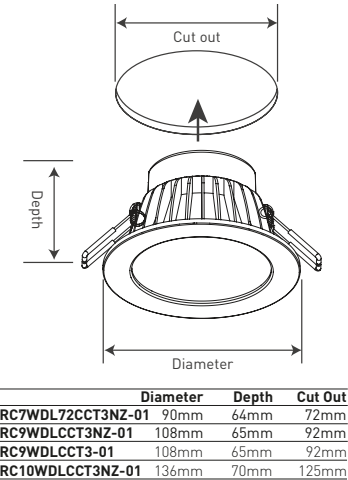



	7W	9W	10W
Loop in/ loop out	<b>RC7WDL72CCT3NZ-01</b>	<b>RC9WDLCCCT3NZ-01</b>	<b>RC10WDLCCCT3NZ-01</b>
0.6m flex and plug		<b>RC9WDLCCCT3-01</b>	
<b>Comparable to:</b>	50W Halogen	50W Halogen	100W GLS
<b>Total Power (W):</b>	6.6/6.3/6.6	7.2/7.1/7.2	10
<b>Total Light Output (lm):</b>	590/630/620	650/730/700	920/1000/950
<b>Efficacy (lm/cctW):</b>	90/100/94	92/104/98	90/100/95
<b>Lifetime (hrs):</b>	30,000	30,000	30,000
<b>Lux at 1m (lux):</b>	250/300/270	280/310/300	400/430/400
<b>Beam Angle (deg):</b>	100	100	100
<b>CCT (K):</b>	3000/4000/6500	3000/4000/6500	3000/4000/6500
<b>CRI:</b>	80	80	80
<b>IP:</b>	44	44	44
<b>Power Factor (PF):</b>	0.9	0.9	0.9
<b>Diameter (mm):</b>	90	108	136
<b>Depth (mm):</b>	64	65	70
<b>Cut out (mm):</b>	72	92	125
<b>Box Qty:</b>	1	1	1
<b>Weight (kg):</b>	0.22	0.28	0.31

**Note:** Multiple CCT data shown in format Warm White / Neutral White / Daylight White

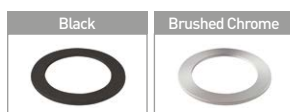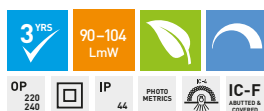

#### Accessories:

- RC7TRIM-04** 72mm cut out, Black
- RC9TRIM-04** 92mm cut out, Black
- RC125TRIM-04** 125mm cut out, Black
- RC7TRIM-13** 72mm cut out, Brushed Chrome
- RC9TRIM-13** 92mm cut out, Brushed Chrome
- RC125TRIM-13** 125mm cut out, Brushed Chrome
- RC10160TRIM-01** Extension trim to 125mm cut out, White