



Representative Photo Only
(actual product may vary based on configuration selections)

Direct On-Line Starter 5.5KW, IP66 Polycarbonate Enclosure,
Controlvoltage 415 V AC, Start, Stop Pushbuttons, No Overload

- Insulated IP66 enclosure for high ingress protection
- Complete with choice of stop, start and reset pushbuttons to match your application requirements
- 11 to 18.5kW: low heat dissipation from included CEP7 electronic overload for minimum cooling
- 5.5 to 7.5kW: choice of CT7N thermal overload or CEP7-E electronic overload (ordered separately)

SPECIFICATIONS

Product Type	Main Product
Approx. kW (AC 3, 400/415 V AC)	5.5
Enclosure Type	Insulated polycarbonate enclosed (IP 66)
Setting Range (Amps)	0.1...12.5
Motor Connection	3 wire
Control Voltage	415 V AC
Button Arrangement	Start / Stop
IP rating	IP66

REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-


Catalogue No: **CAT7N-5.5P-415VAC**

STARTER DOL 5.5kW START/STOP 415V AC CONTROL NO OVERLOAD

Motor Control and Drives > Motor Starting and Protection > Assembled Motor Starters > Sprecher+Schuh Motor Starters
> Direct On Line Motor Starters > CAT7N DOL Starters 5.5 to 18.5kW




**INCOMING SUPPLY
50 kA PROSPECTIVE**

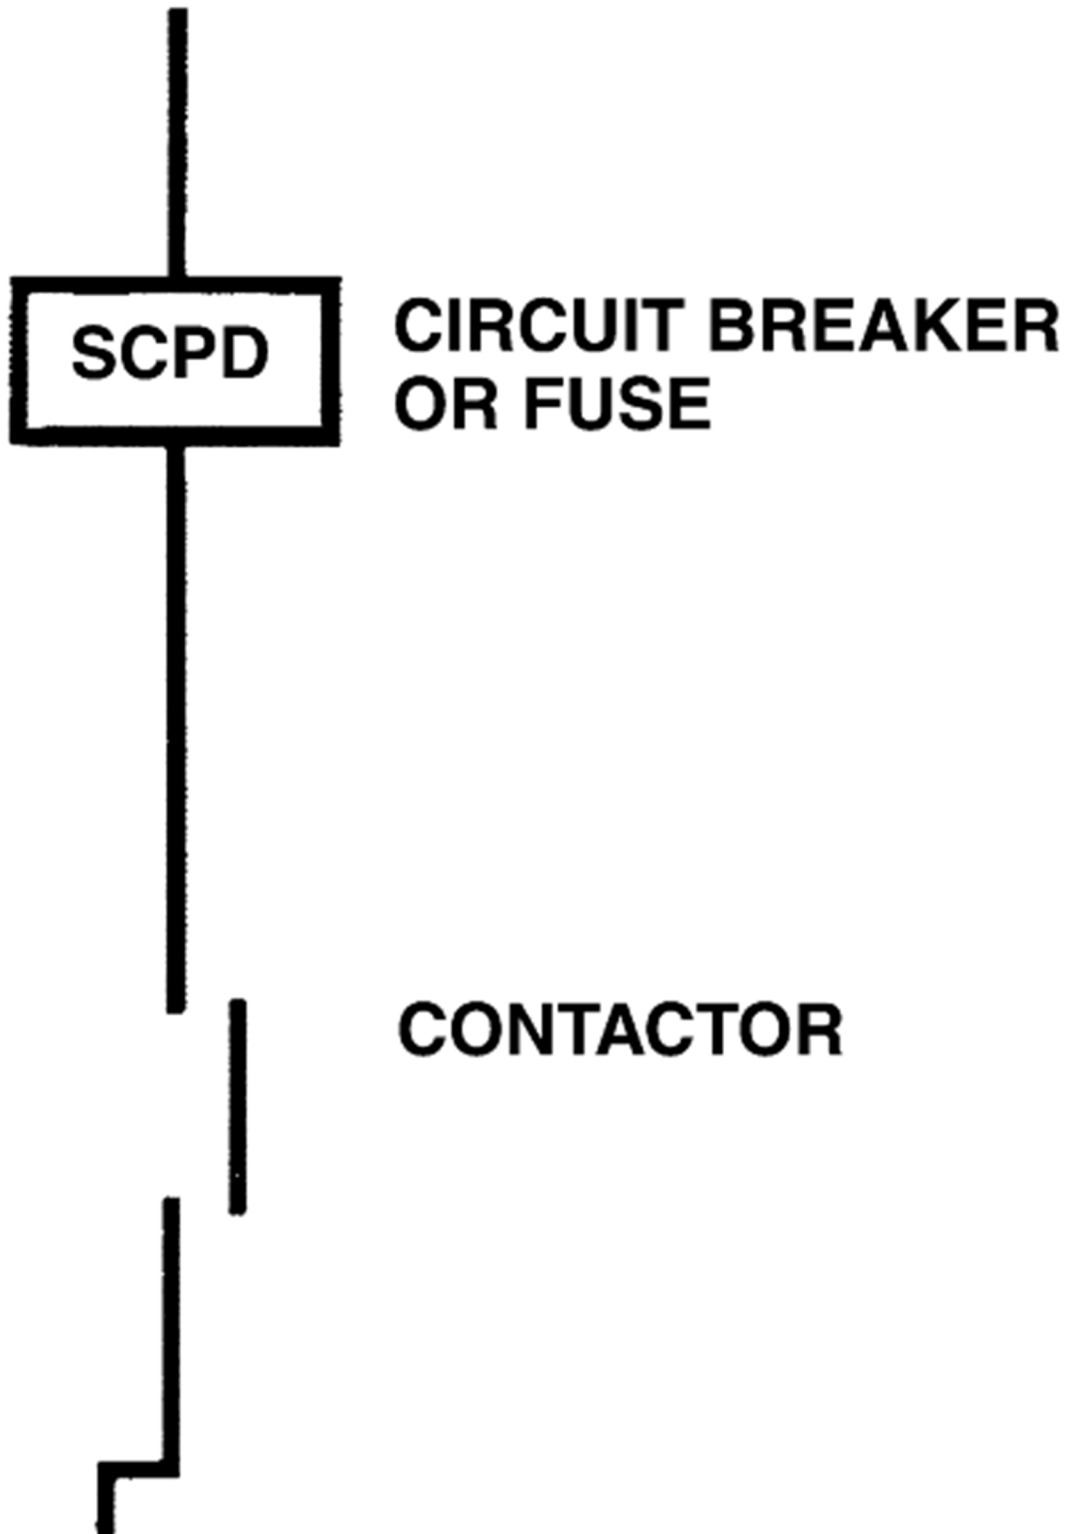

Catalogue No: **CAT7N-5.5P-415VAC**

STARTER DOL 5.5kW START/STOP 415V AC CONTROL NO OVERLOAD

Motor Control and Drives > Motor Starting and Protection > Assembled Motor Starters > Sprecher+Schuh Motor Starters
> Direct On Line Motor Starters > CAT7N DOL Starters 5.5 to 18.5kW

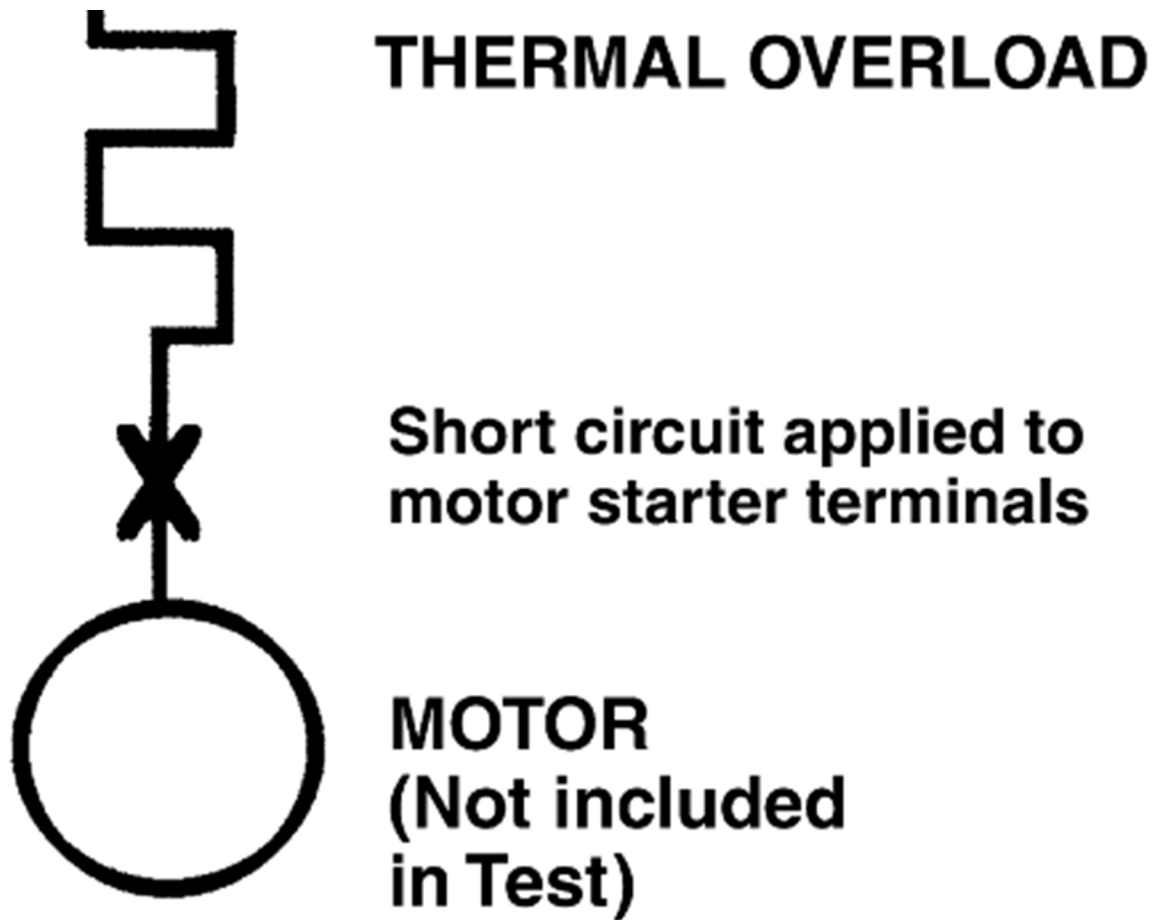

Technical Diagram