


## BOOTLACE TERMINALS

Cabac Bootlace Terminals are specialised connectors designed for terminating conductors by containing the strands in a thin-walled copper sleeve. This sleeve is crimped onto the conductor to ensure that conductor strands are securely held in place, preventing any stray strands and protecting against potential damage caused by screws in the terminal.

### KEY FEATURES:

- Terminate stranded conductors, containing all strands in a thin-walled copper sleeve crimped to the conductor.
- The crimp holds the sleeve in place until the housing screw establishes a connection.
- Use one of our HNKE range of crimp tools for optimal results.
- All components are Halogen Free, ensuring environmental safety.
- Suitable for applications with a temperature rating between -55°C to +105°C.
- Material composition: Copper and Nylon.
- Suitable for use with copper cables only.
- Plating micron thickness: 0.003mm

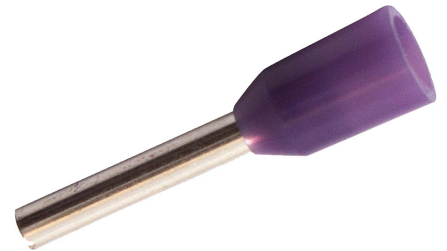

### INSTALLATION GUIDELINES:

Ensure that the conductor is stripped to the appropriate length.

Slip the Bootlace sleeve over the stripped conductor, ensuring that all strands are enclosed within the sleeve.

Crimp the sleeve onto the conductor using the recommended HNKE range of crimp tools.

The crimped sleeve should be securely attached to the conductor, ready for connection.

Use the Cabac Bootlace Terminal in conjunction with the appropriate terminal housing, tightening the screw to establish a reliable electrical connection.

### SAFETY INFORMATION:

Ensure proper handling of the product to prevent damage or distortion of the Bootlace sleeve during installation.

Use in accordance with recommended temperature limits.

Verify compatibility with copper cables only; do not use with other conductor materials.

### CAUTION:

Avoid over-crimping, as this may damage the conductor or compromise the effectiveness of the connection.


Follow industry-standard safety practices during installation.

Store Cabac Bootlace Terminals in a dry and cool environment, away from direct sunlight.

MKT301

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.

## BOOTLACE TERMINALS

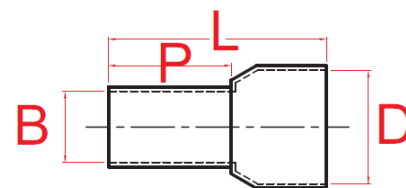

| PART NO.   | NOMINAL CONDUCTOR (mm²) | B (mm) | D (mm) | L (mm) | P (mm) | COLOUR | UNIT | QTY |
|------------|-------------------------|--------|--------|--------|--------|--------|------|-----|
| BLP025     | 0.25                    | 0.75   | 1.9    | 10     | 6      | Violet | PAK  | 100 |
| BLP034     | 0.34                    | 0.8    | 1.9    | 10     | 6      | Pink   | PAK  | 100 |
| BLP050     | 0.5                     | 1.3    | 3.4    | 14     | 8      | White  | PAK  | 100 |
| BLP050/500 | 0.5                     | 1.3    | 3.4    | 14     | 8      | White  | PAK  | 500 |
| BLP075     | 0.75                    | 1.5    | 3.8    | 14     | 8      | Blue   | PAK  | 100 |
| BLP075/500 | 0.75                    | 1.5    | 3.8    | 14     | 8      | Blue   | PAK  | 500 |
| BLP100     | 1                       | 1.7    | 4.1    | 14     | 8      | Red    | PAK  | 100 |
| BLP100/500 | 1                       | 1.7    | 4.1    | 14     | 8      | Red    | PAK  | 500 |
| BLP150     | 1.5                     | 2      | 4.6    | 14     | 8      | Black  | PAK  | 100 |
| BLP150-18  | 1.5                     | 2      | 4.6    | 24     | 18     | Black  | PAK  | 100 |
| BLP150/500 | 1.5                     | 2      | 4.6    | 14     | 8      | Black  | PAK  | 500 |
| BLP250     | 2.5                     | 2.6    | 4.9    | 14     | 8      | Grey   | PAK  | 100 |
| BLP250-18  | 2.5                     | 2.6    | 4.9    | 24     | 18     | Grey   | PAK  | 100 |
| BLP400     | 4                       | 3.2    | 5.8    | 18     | 10     | Orange | PAK  | 100 |
| BLP400-18  | 4                       | 3.2    | 4.8    | 26     | 18     | Orange | PAK  | 100 |
| BLP600     | 6                       | 3.9    | 6.9    | 20     | 12     | Green  | PAK  | 50  |
| BLP600-18  | 6                       | 3.9    | 6.9    | 26     | 18     | Green  | PAK  | 50  |
| BLP1000    | 10                      | 4.9    | 8.4    | 22     | 12     | Brown  | PAK  | 25  |
| BLP1000-18 | 10                      | 4.9    | 8.4    | 28     | 18     | Brown  | PAK  | 25  |
| BLP1600    | 16                      | 6.2    | 9.6    | 24     | 12     | Ivory  | PAK  | 25  |
| BLP1600-18 | 16                      | 6.2    | 9.6    | 28     | 18     | Ivory  | PAK  | 25  |
| BLP2500    | 25                      | 7.7    | 12     | 28     | 16     | Black  | PAK  | 10  |
| BLP2500-22 | 25                      | 7.3    | 11.2   | 36     | 22     | Black  | PAK  | 10  |
| BLP3500    | 35                      | 8.7    | 13.5   | 30     | 16     | Red    | PAK  | 10  |
| BLP3500-25 | 35                      | 8.3    | 12.7   | 37     | 25     | Red    | PAK  | 10  |
| BLP5000    | 50                      | 10.9   | 16     | 36     | 20     | Blue   | PAK  | 10  |
| BLP7000    | 70                      | 14.3   | 17.2   | 37     | 21     | Yellow | PAK  | 5   |
| BLP9500    | 95                      | 15.5   | 19.2   | 44     | 25     | Red    | PAK  | 3   |
| BLP12000   | 120                     | 17.6   | 21.4   | 48     | 27     | Blue   | PAK  | 3   |

MKT301

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.