

Insulating enclosures and enclosures for automation

IP65 Thermoplastic and IP65 polycarbonate enclosures

IP65 Thermoplastic enclosures

- RAL7035 grey colour
- Opaque and transparent screw on lid versions
- Operating temperature from -25°C to +75°C
- Shock resistance to 6 joules
- High resistance to heat, chemical and atmospheric agents
- Lids have stainless steel screws or quarter turn plastic screws, depending upon the enclosure size




7

Cover	External dimensions H x W x D (mm)	Internal dimensions H x W x D (mm)	Lid screw type	Order code
Opaque	113 x 113 x 67	100 x 100 x 50	Stainless	LE00846
	114 x 79 x 67	105 x 70 x 50	Stainless	LE00850
	113 x 113 x 87	100 x 100 x 80	Stainless	LE00851
	162 x 120 x 73	153 x 110 x 66	Stainless	LE00852
	170 x 145 x 87	160 x 135 x 77	¼ turn plastic	LE00854
	231 x 181 x 89	220 x 170 x 80	¼ turn plastic	LE00856
	323 x 251 x 117	310 x 240 x 110	¼ turn plastic	LE00858
	170 x 145 x 156	160 x 135 x 150	¼ turn plastic	LE00860
	231 x 181 x 160	220 x 170 x 150	¼ turn plastic	LE00862
	323 x 251 x 170	310 x 240 x 160	¼ turn plastic	LE00864
Clear	162 x 120 x 73	153 x 110 x 66	¼ turn plastic	LE00872
	170 x 145 x 87	160 x 135 x 77	¼ turn plastic	LE00874
	231 x 181 x 89	220 x 170 x 80	¼ turn plastic	LE00876
	323 x 251 x 117	310 x 240 x 110	¼ turn plastic	LE00878
	170 x 145 x 156	160 x 135 x 150	¼ turn plastic	LE00880
	231 x 181 x 160	220 x 170 x 150	¼ turn plastic	LE00882
	323 x 251 x 170	310 x 240 x 160	¼ turn plastic	LE00884

Accessories for IP65 thermoplastic enclosures

Description	Suits enclosure type	Order code
Mounting plate	LE00824-LE00830-LE00824-LE00830-LE00874-LE00854-LE00860-LE00880	LP00900
	LE00826-LE00832-LE00876-LE00856-LE00862-LE00882	LP00902
	LE00929-LE00834-LE00878-LE00858-LE00864-LE00884	LP00904
35mm DIN rail - slotted - 2metre length		DR12849



Insulating enclosures and enclosures for automation


IP65 Thermoplastic and IP65 polycarbonate enclosures

IP65 polycarbonate enclosures

- RAL7035 grey colour
- Opaque and transparent screw on lid versions
- Operating temperature from -25°C to +75°C
- Shock resistance to 20 joules
- High resistance to UV rays, heat, chemical and atmospheric agents
- Hinged lid screws included with each enclosure to allow hinging on left or right with 140° opening



Cover	External dimensions H x W x D (mm)	Order code
Opaque	140 x 220 x 140	LE12804
	205 x 220 x 140	LE12808
	275 x 220 x 140	LE12812
	275 x 370 x 140	LE12814
	275 x 570 x 140	LE12816
	380 x 570 x 140	LE12818

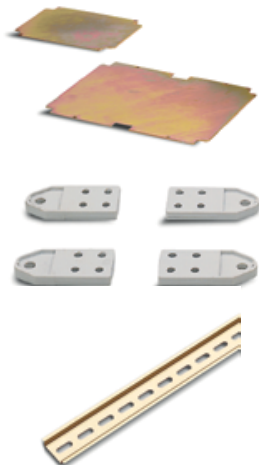

Accessories for IP65 thermoplastic enclosures

Description	Suits enclosure type	Order code
Mounting plate	LE12804	LP12842
	LE12808	LP12844
	LE12812	LP12845
	LE12814	LP12846
	LE12816	LP12847
	LE12818	LP12848
Wall mounting brackets for IP65 enclosures (Pack of 4)		LA12858
35mm DIN rail – slotted – 2metre length		DR12849

Spare lid screws for enclosure

Description	Suits enclosure type	Order code
Steel lid screw	LE00846, LE0050, LE00851, LE00852, LE00872	M910520000
¼ turn standard lid screw	LE00854, LE00856, LE00858, LE00860, LE00862, LE00864, LE00874, LE00876, LE00878, LE00880, LE00882, LE00884	M912890000
¼ turn hinged lid screw	LE00854, LE00856, LE00858, LE00860, LE00862, LE00864, LE00874, LE00876, LE00878, LE00880, LE00882, LE00884	M912880000
Threaded standard lid screw	LE12804, LE12808, LE12812, LE12814, LE12816, LE12818	M952310000
Threaded hinged lid screw	LE12804, LE12808, LE12812, LE12814, LE12816, LE12818	M911020000

