

HPPP1G HPPP2G HPPP151G HPPPSW2G HPSMK2G

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.

Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic)


Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.

Hippo Range of Power Points


HPPP1G, HPPP2G, HPPP151G and HPPPSW2G

- 10Amp 250V rated modular weatherproof sockets
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- IP54 ideal for prevention against water splashes or harmful objects that may compromise conventional socket outlets. Perfect for use in exterior applications, or damp/dusty environments such as building exteriors, carports, gardens or workshops
- Styling matches the rest of the TRADER HIPPO family of products
- Single gang back mounting boxes that contain 20mm and 25mm plain entries
- Double gang boxes containing 25mm plain and threaded entries
- For the twin socket with extra switch HPPPSW2G, the switch has a rating of 10AX
- Colour: Grey

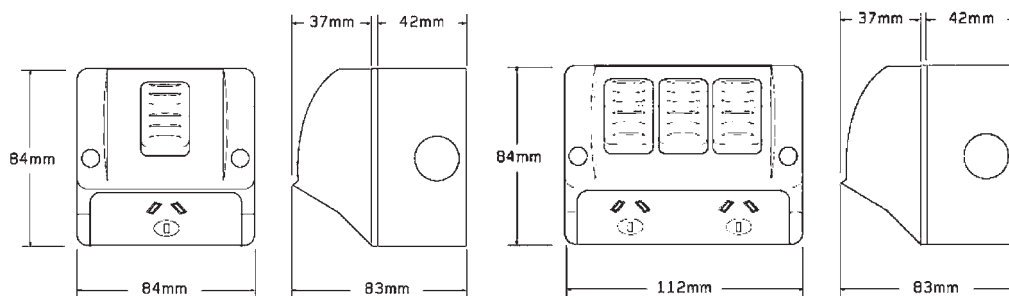

HPSMK2G Mounting Block (Not pictured)

- Mounting block to suit HPPP2G and HPPPSW2G
- Made from UV stabilised polycarbonate to avoid discolouring to yellow

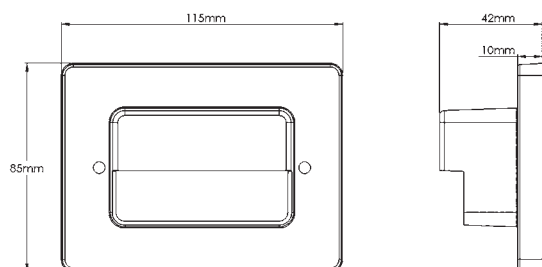

Catalogue Number	Description
HPPP1G	Single Outdoor Power Point IP54 10A
HPPP151G	Single Outdoor Power Point IP54 15A
HPPP2G	Double Outdoor Power Point IP54 10A
HPPPSW2G	Double Outdoor Power Point With Extra Switch IP54 10A
HPSMK2G	84 mm Recessed Mounting Adaptor

Certification Number:
GMA-103194-EA-005

GSM Electrical (Australia) Pty Ltd
Level 2/142-144 Fullarton Road, ROSE PARK SA 5067
p: 1300 301 838 f: 1300 301 778 e: service@gsm.com.au
www.gsm.com.au



Data Specification Sheet
May 2016

