


## PVC CORRUGATED CONDUIT MEDIUM DUTY

### FEATURES:

- Tripac electro-insulating corrugated conduit is an excellent choice for complex installations where flexibility is required.
- Medium duty grey conduit is suitable for use in above-ground electrical applications.
- Designed to protect and route electrical wiring.
- Compression Strength  $\geq 750\text{N}$ .
- UV Stabilized.
- Minimum working temperature:  $-5^{\circ}\text{C}$
- Maximum working temperature:  $60^{\circ}\text{C}$
- UV stabilised: Yes
- Mercury & lead-free: Yes

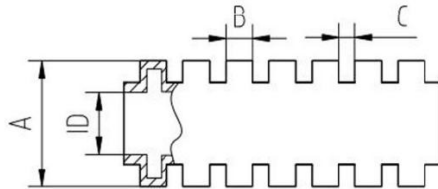

PART NO.	DESCRIPTION	ID (MM)	A (MM)	B (MM)	C (MM)
CC1650	16mm Corrugated Conduit 50m	11.5	16	2.4	1.2
CC2010	20mm Corrugated Conduit 10m	15	20	2.6	1.2
CC2020	20mm Corrugated Conduit 20m	15	20	2.6	1.2
CC2050	20mm Corrugated Conduit 50m	15	20	2.6	1.2
CC2510	25mm Corrugated Conduit 10m	18.5	25	2.8	1.3
CC2520	25mm Corrugated Conduit 20m	18.5	25	2.8	1.3
CC2550	25mm Corrugated Conduit 50m	18.5	25	2.8	1.3
CC3210	32mm Corrugated Conduit 10m	25	32	3.3	1.5
CC3225	32mm Corrugated Conduit 25m	25	32	3.3	1.5
CC4010	40mm Corrugated Conduit 10m	32	40	3.5	1.5
CC4025	40mm Corrugated Conduit 25m	32	40	3.5	1.5
CC5010	50mm Corrugated Conduit 10m	42	50	3.5	1.5
CC5025	50mm Corrugated Conduit 25m	42	50	3.5	1.5

### ORDERING INFORMATION

PART NO.	DESCRIPTION	SIZE	WEIGHT
CC1650	16mm MD GREY	28x28x14cm	2.30kg
CC2010	20mm MD GREY	30x30x12cm	0.75kg
CC2020	20mm MD GREY	34x34x13cm	1.50kg
CC2050	20mm MD GREY	40x40x20cm	3.75kg
CC2510	25mm MD GREY	33x33x14cm	1.05kg
CC2520	25mm MD GREY	37x37x15cm	2.10kg
CC2550	25mm MD GREY	42x42x25cm	5.25kg
CC3210	32mm MD GREY	37x37x13cm	1.30kg
CC3225	32mm MD GREY	46x46x20cm	3.25kg
CC4010	40mm MD GREY	39x39x16cm	1.90kg
CC4025	40mm MD GREY	50x50x22cm	4.75kg
CC5010	50mm MD GREY	45x45x17cm	2.60kg
CC5025	50mm MD GREY	56x56x26cm	6.50kg

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.