

LED SPIKE LIGHT

SL7266 MINI SPIKE


CONSTRUCTION

- Die-cast aluminium body
- Powder coated finish
- Built in COB LED chip with aluminium reflector
- 12V AC or DC driver required
- 1.5 m double insulated cable fitted

IP RATING

- IP65 weatherproof

DIMENSIONS



Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
SL7266WW/BK	12V	6W	400lm	2900K	>80	30°	Black

LED WALL LIGHT

S9337 BREMER


CONSTRUCTION

- Die-cast aluminium body
- Stainless steel face panel & screws
- Plastic concrete can included
- High output LED chip
- Built-in constant current LED driver

IP RATING

- IP44 weatherproof

DIMENSIONS

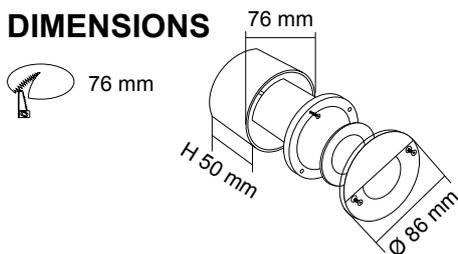

Model No.	Input	Power	Lumen	CCT	CRI	Fitting Colour
S9337	240V	2W	140lm	3000K	>80	Stainless Steel

Specifications above are for reference only and may vary without prior notice