

NYLON UV CABLE TIES


FEATURES

- Made from Polyamide 6,6, Halogen Free
- Head/pawl integrally moulded for added strength, bent tip design for easy insertion
- Smooth round edges, safe and will not cut insulation
- UV stabilised for outdoor use



ORDERING INFORMATION

PART NO.	LOOP TENSILE STRENGTH (KG)	BUNDLE DIAMETER (MM)	LENGTH (MM)	WIDTH (MM)	THICKNESS (MM)	COLOUR	UNIT	QTY
CT98BK/100	8	22	100	2.5	1.1	BLACK	PAK	100
CT98BK/1000	8	22	100	2.5	1.1	BLACK	PAK	1000
CT140BK/100	18	33	140	3.6	1.2	BLACK	PAK	100
CT140BK/1000	18	33	140	3.6	1.2	BLACK	PAK	1000
CT200BK/100	22	50	200	4.8	1.3	BLACK	PAK	100
CT200BK/1000	22	50	200	4.8	1.3	BLACK	PAK	1000
CT250BK	22	60	250	4.8	1.4	BLACK	PAK	100
CT250BK/1000	22	60	250	4.8	1.4	BLACK	PAK	1000
CT290BK	22	76	300	4.8	1.4	BLACK	PAK	100
CT290BK/1000	22	76	300	4.8	1.4	BLACK	PAK	1000
CT360BK	22	102	370	4.8	1.4	BLACK	PAK	100
CT430BK	22	110	430	4.8	1.4	BLACK	PAK	100

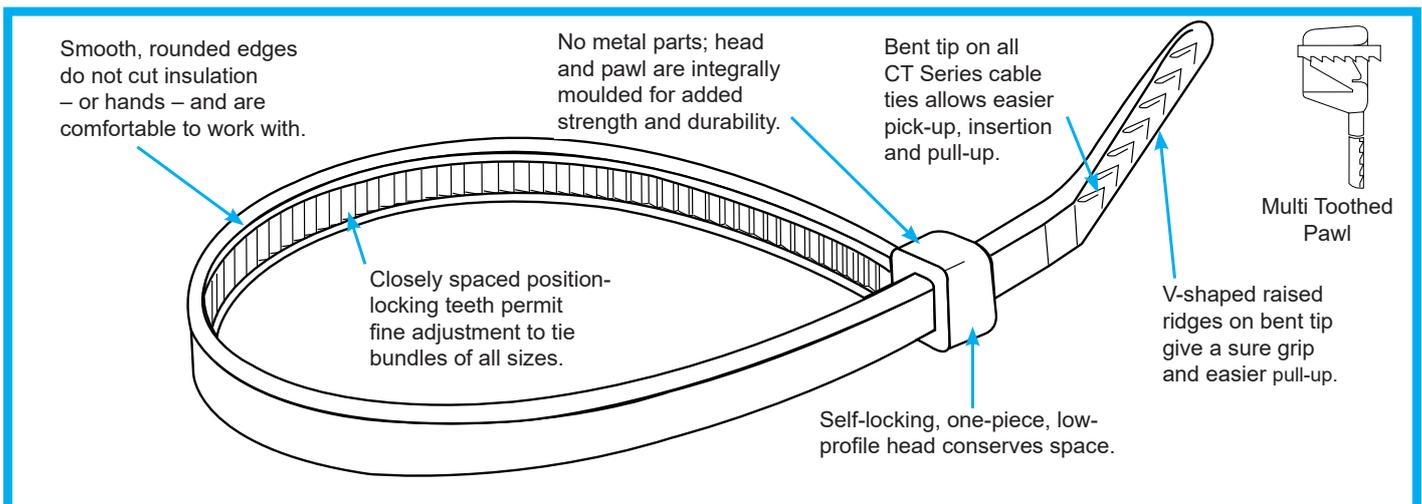

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.

Cable Ties - Polyamide 6,6 (PA66) Nylon® Halogen Free

Over decades we have developed our Cable Tie to meet the most demanding range of climate conditions found across Australia and New Zealand, which exhibit extremes of temperature, humidity and UV radiation levels.

One-piece, injection-moulded construction provides maximum strength and adjustability for securing all sizes of bundles. Extra features such as rounded edges and bent-tip design make installation easy, fast, accurate and secure. Installation tools are not required but are suggested where controlled, uniform tension and cut-off applications are desired.

Split mandrel, loop tensile strength tests show that the most vulnerable stress point for a nylon cable tie is its pawl. There is a trade-off between insertion/pull-up ease and strength of a cable tie. The stronger the pawl, the more force is required to insert and pull up the strap as it engages the pawl teeth. Cable ties are designed to optimise insertion ease and still meet or exceed all applicable strength requirements. This magnified cross-section illustrates our full four-tooth locking engagement between strap and pawl under load. This intimate contact between pawl and strap teeth, ensures that the strength of the pawl is fully utilised.

Installations under conditions of full tropical sun and/or very low relative humidity, must be referred to CABAC design engineers for evaluation and recommendations.

Exterior applications should use black (U.V. stabilised) ties.



Technical Data

Conformant Standards

UL; Mil Spec; IEC; VDE; DIN

Refer

[Mil-S-23190E - testing](#)

Smoke Emission

Low smoke / Halogen free

Material

[NATURAL - PA 66 with additives](#)

BLACK - PA 66 with UV stabilisers

Electrical data

[Breakdown voltage](#) 20 kV/mm

Moisture content 2.5% w.v. @

23%/50%RH

Operating Temperature

-40°C to 85°C

Flammability

Passed - U.L. 94V-2

UV Stability (Black Ties only)

Nylon Polyamide 66 material with 2.5% Carbon Black for UV Protection.

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.