


# Insulated Copper Pair Coil

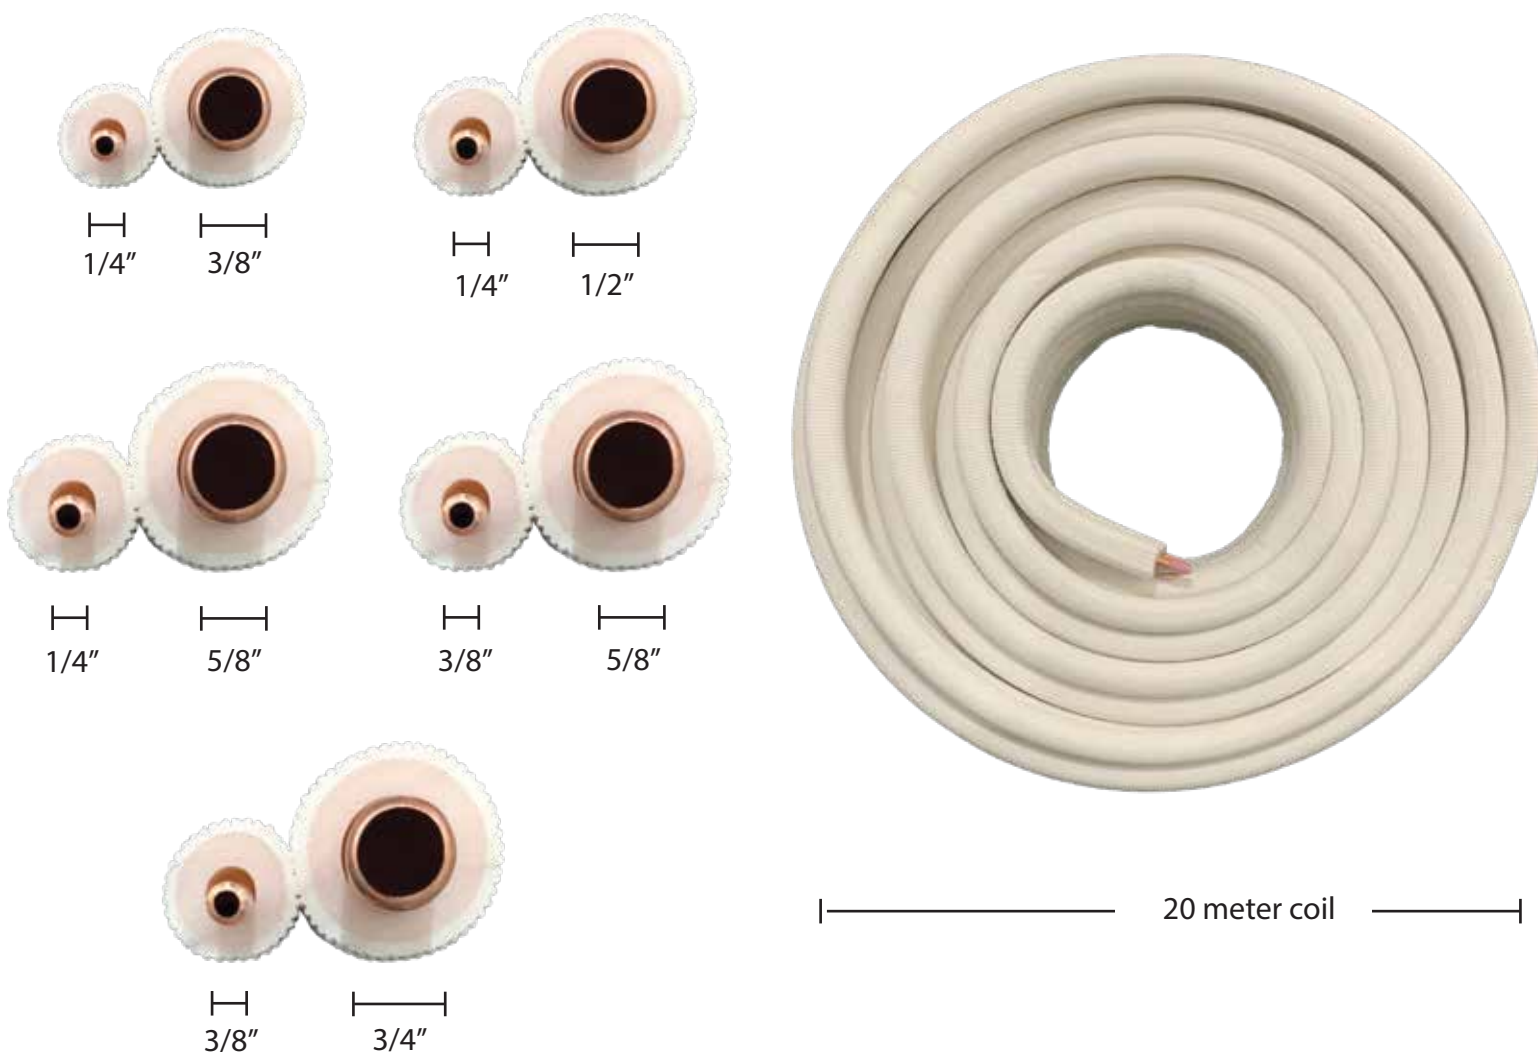

## FEATURES

- Copper manufactured to AS/NZS1571.  
Recommended maximum operating temperature is 65°C and in accordance with AS1677.  
A/C manufacturer's operating should be consulted
- Pipe insulation meets the requirements of insulation material in accordance with AS/NZS 4859.1
- Insulated pair coil glued together for easier installation

## Insulated Copper Pair Coil

Product Number	PC201438	PC201412	PC201458	PC203858	PC203834
Diameter (imperial)	1/4" & 3/8"	1/4" & 1/2"	1/4" & 5/8"	3/8" & 5/8"	3/8" & 3/4"
Diameter (metric)	6.35 & 9.52	6.35 & 12.70	6.35 & 15.80	9.52 & 15.80	9.52 & 19.05
Copper Thickness (mm)	0.8 - 0.8	0.8 - 0.8	0.8 - 0.8	0.8 - 1.0	0.8 - 1.0
Insulation thickness	10mm - 10mm	10mm - 10mm	10mm - 10mm	10mm - 10mm	10mm - 10mm
Roll length (m)	20	20	20	20	20