



# Actinic BL TL-D(K) Secura

## Actinic BL TL-D 15W/10 Secura 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		UV Depreciation at 5000 h	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]		40 %
Main Application	Insect traps	Operating and Electrical	
Life to 50% Failures (Nom)	11000 h	Power (Nom)	15 W
Useful Life (Nom)	9000 h	Lamp Current (Nom)	0.335 A
Light Technical		Voltage (Nom)	55 V
Color Code	10	Approval and Application	
Color Designation	Actinic	Mercury (Hg) Content (Nom)	5.5 mg
Chromaticity Coordinate X (Nom)	222	UV	
Chromaticity Coordinate Y (Nom)	210	UV-B/UV-A (IEC)	0.2 %
UV Depreciation at 2000 h	25 %		

## Actinic BL TL-D(K) Secura

UV-A Radiation 100Hr (IEC)	3.15 W
<b>Product Data</b>	
Full product code	871150089858640
Order product name	Actinic BL TL-D 15W/10 Secura 1SL/25
EAN/UPC - Product	8711500898586
Order code	928024701029

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928024701029
Net Weight (Piece)	61.000 g


### Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 15W/10	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
Secura 1SL/25					

#### TL-D 15W/10 SECU

### Photometric data

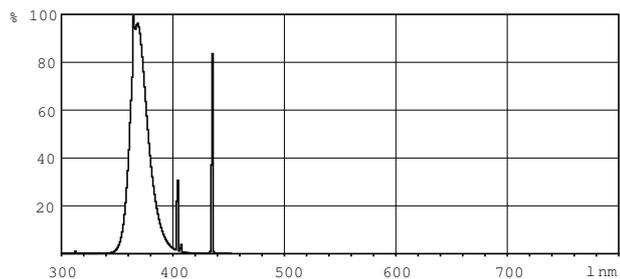

XDPB\_XUBTLD\_10-Spectral power distribution B/W

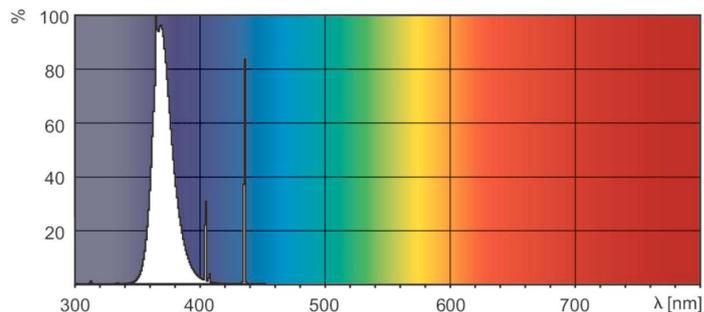

XDPO\_XUBTLD\_10-Spectral power distribution Colour

