





LIFESAVER

6000 SERIES

6000WB WIRELESS BASEPLATE

RF Interlink Baseplate for LIFESAVER 6000 Series Smoke Alarms

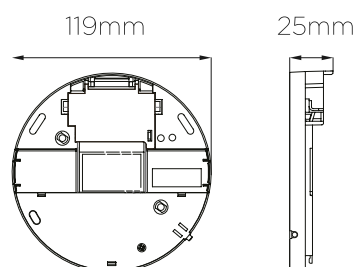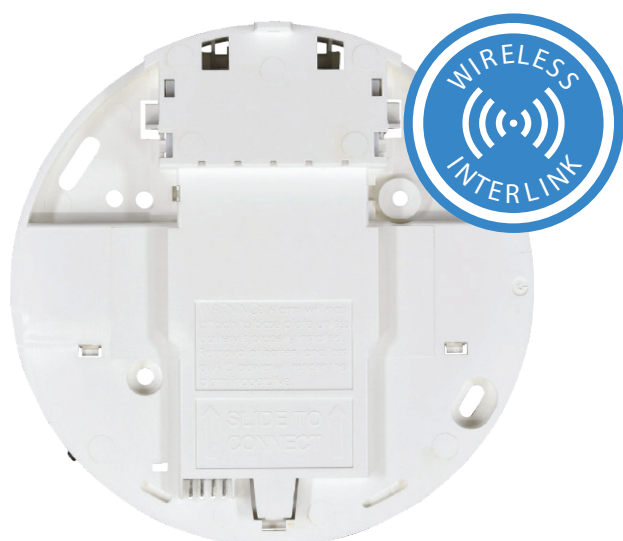

Tested & Complies to
Australian Standards
AS3786:2014

Application

The PSA LIFESAVER 6000WB is an auxiliary product to the 6000 and 6000RL smoke alarms. It is a smoke alarm baseplate with an in-built RF interlink module.

When a LIFESAVER 6000-series mains powered smoke alarm is installed onto it, it can wirelessly interlink with other 6000-series smoke alarms also mounted onto 6000WB bases. As a result, when the smoke alarm sounds, the 6000WB will cause other smoke alarms in the same RF interlinked network to also go into alarm. The 6000WB, when paired with the 6000THL wireless smoke alarm controller, can remotely test and hush 6000 and 6000RL model smoke alarms.

The PSA LIFESAVER 6000WB RF interlink protocol is wirelessly compatible with the PSA LIFESAVER 6000DCW wireless 10-year lithium battery (non-replaceable) smoke alarm.

Features

- The 6000WB wireless base is designed to be connected to LIFESAVER 6000 and 6000RL smoke alarms.
- RF baseplate to interlink LIFESAVER 6000 series smoke alarms wirelessly
- When a smoke alarm triggers, it activates other smoke alarms wirelessly in the network
- Wirelessly interlink up to 24 units
- Combine with 6000THL controller to remotely test and hush 6000 and 6000RL model smoke alarms.
- Continuous operation in the event of power outage.
- Fully monitored and supervised wireless network
- Interconnect smoke alarms from different circuits.
- Wirelessly compatible with LIFESAVER 6000DCW, 10 year wireless lithium battery smoke alarm
- 5 year warranty
- ActivFire Certified, Approved to AS/NZS4268:2017 and AS/NZS60950.1:2015

6000WB WIRELESS BASEPLATE

RF Interlink Baseplate for LIFESAVER 6000 Series Smoke Alarms

Technical Specifications

Model	6000WB
Part Number	LIF6000WB
Power	Powered from smoke alarm
Interconnecting	Interconnectable up to 24 units
Power Consumption	From smoke alarm
RF Frequency	918MHz
RF Range	100m line of sight 30m indoors
Temperature Range	0°C to 45°C
Humidity Range	Up to 95% relative humidity (RH)
Approvals	ActivFire AS/NZS 4268:2017 AS/NZS 60950.1:2015 RCM
Warranty	5 years

Product

LIF6000WB	Quantity	Barcode
Single	1	9318475001813
Pack	12	19318475001810
Carton	48	29318475001817



6000 Series Range

6800	240V, 9V battery backup smoke alarm
6800RL	240V, 10yr backup battery smoke alarm (non-replaceable)
6000DCW	10yr wireless smoke alarm
6000THL	Smoke alarm control (wireless)

Accessories

LIFSAIR	Isolation relay (Gen 2)
LIFSAIRMB	Isolation relay (Gen 2) within mounting block
LIFMB3848	Mounting block
LIFLT711	Smoke alarm tester (aerosol)

Technical Specifications

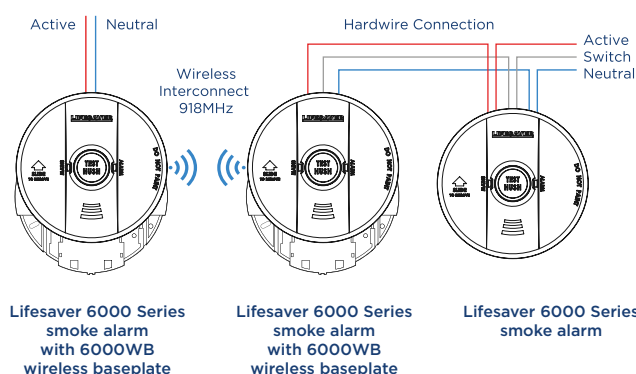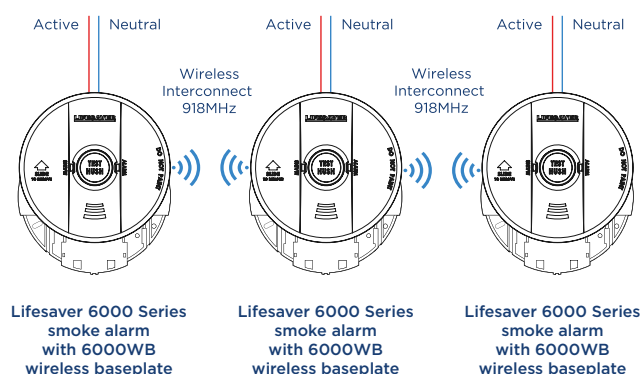

Due to continual product development, PSA Products Pty Ltd reserves the right to alter specifications, product details, modify designs and discontinue items without notice or incurring obligation. Whilst every effort is made to ensure that specifications and other information in this document are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein. © 2021 PSA Products Pty Ltd. All Rights Reserved.