

Shadoweco LED Floodlight

SHADOWECO200CS

- One box solution with colour select
- Easy push button change colour temperature between 3000K/4000K/5000K
- Anti-fog diffuser with breather in-built cable gland



COLOUR SELECT

Performance

System Power	200W
Exit Lumen	23654lm, 19565lm, 21757lm
Efficacy	120lm/W, 106lm/W, 105lm/W
CCT	4000K, 3000K, 5000K
CRI	80
Operating Temperature	0 to 40
MacAdam Steps	6SDCM
Ingress Protection Rating	IP65
Impact Rating	IK08
Beam Distribution	Symmetric
Beam Angle	110°
Lifetime	54,000hrs (L70/B50)


Physical

Dimensions	L414 x W385 x H102mm
Reflector	Aluminium
Diffuser	Frosted Glass
Luminaire Colour	Black
Weight	6kg
Luminaire Material	Aluminium (Die Cast)
Driver Location	Integrated
Heatsink	Aluminium (Die Cast)
Finish	Powder Coated
Installation	Trunnion

Electrical

Dimming	Non - Dimmable
Voltage	240V
Line Voltage Frequency	50Hz
Inrush Current	65A
Inrush Current Duration	544µs
Line Current	0.90A
Electrical Rating	Class 1

Line Drawings

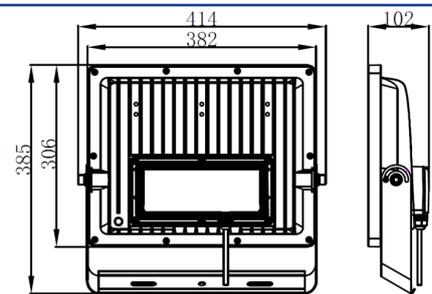

Product Images



