


# Catalogue No: **MOD6MS180**

## MOD6 MAIN SWITCH 1P 80A

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > MOD6 Accessories > MOD6 Main Switches > MOD6 Main Switch

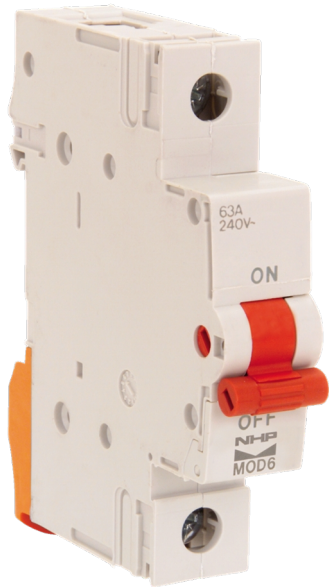

MOD6 main switch, DIN rail, 1P, 80A

Representative Photo Only  
(actual product may vary based on configuration selections)

### SPECIFICATIONS

Product Series	MOD6
Component Type Power Distribution & Protection	Main Switch
In, Rated Current	80 A
Poles	1P
Wire / Conductor Size (Min)	6 mm <sup>2</sup> min
Wire / Conductor Size (Max)	50 mm <sup>2</sup>
Width	18 mm
Ie, Rated Operational Current, nom	80 A,nom
Operating Temperature, Min	-5 °C min
Operating Temperature, Max	40 °C max
Storage Temperature, Min	-25 °C min
Storage Temperature, Max	70 °C max


### REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

# Catalogue No: **MOD6MS180**

## MOD6 MAIN SWITCH 1P 80A

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > MOD6 Accessories > MOD6 Main Switches > MOD6 Main Switch

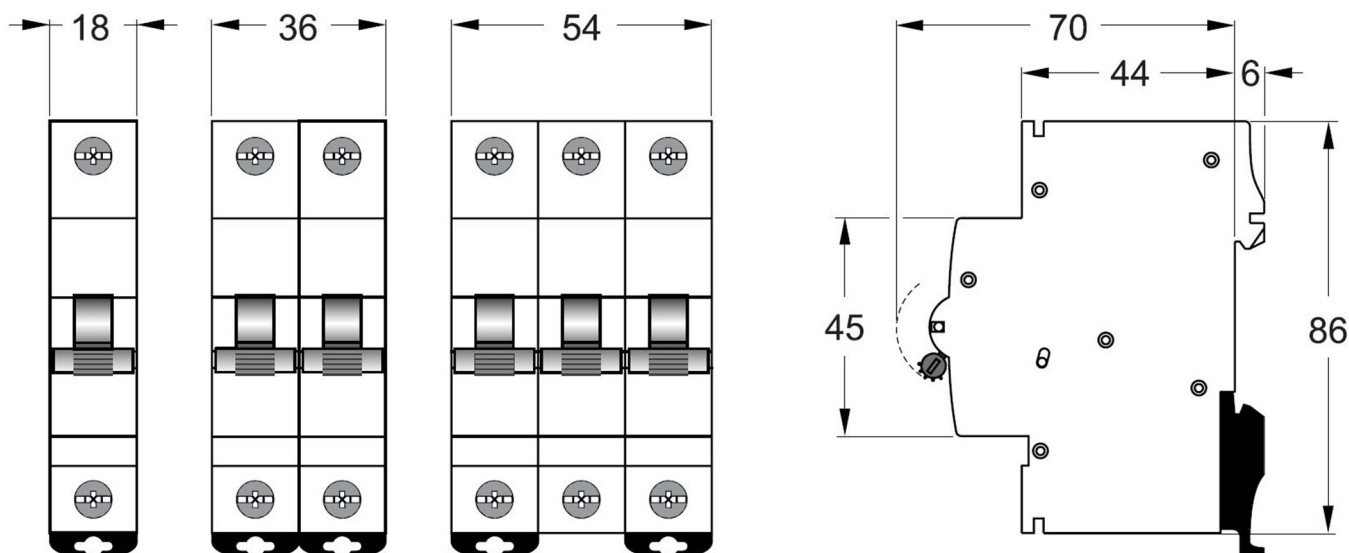

Dimension Diagram